



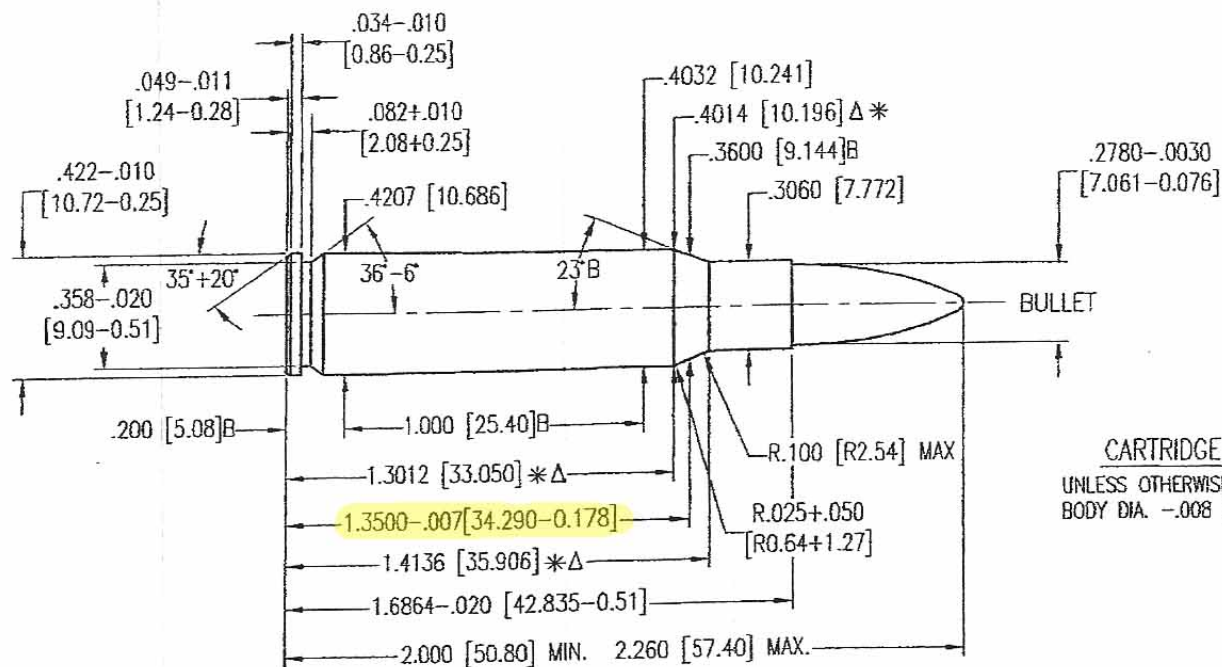

CARTRIDGE
UNLESS OTHERWISE NOTED
BODY DIA. -.008 [.20]

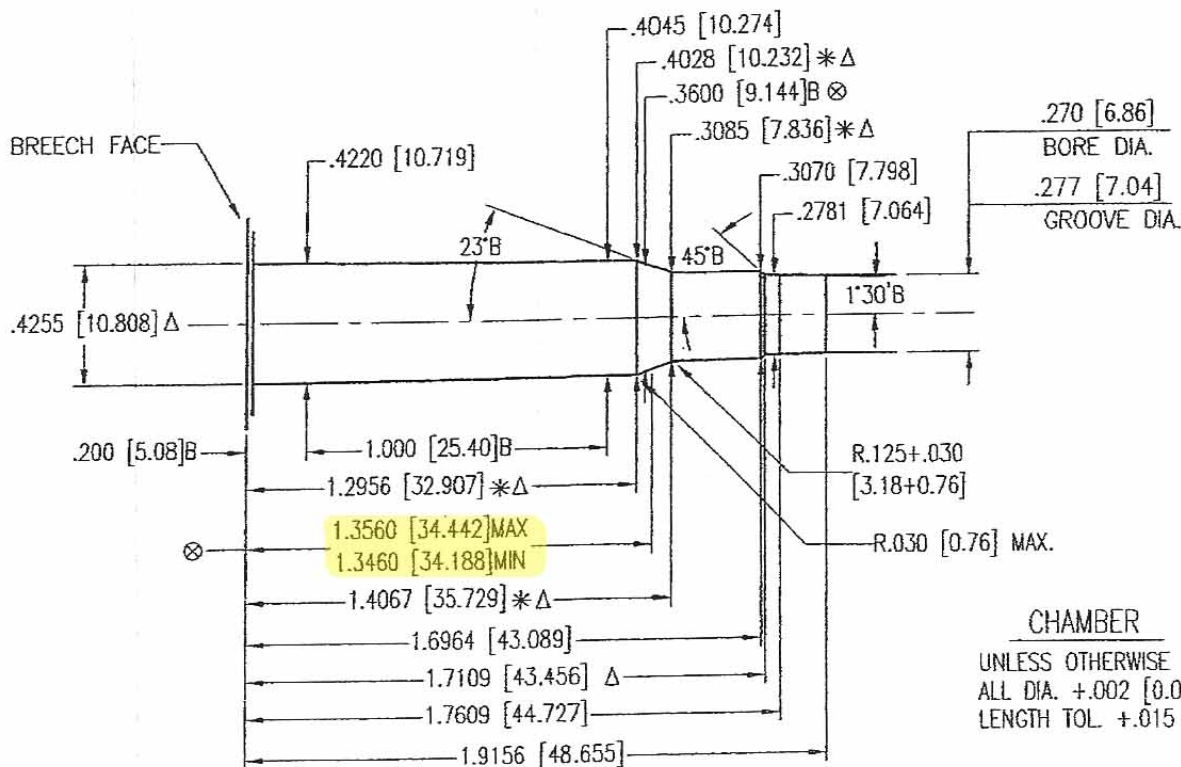

CHAMBER
UNLESS OTHERWISE NOTED
ALL DIA. +.002 [0.05]
LENGTH TOL. +.015 [0.38]

Δ 4 GROOVES
Δ .160+.002 [4.06+0.05] WIDE
TWIST: 10[254] R.H. OPTIONAL
MIN. BORE & GROOVE
AREA: .0596 SQ. IN. [38.451 mm²]

NOTE:
B=BASIC
[XX.XX]=MILLIMETERS
⊗ = HEADSPACE DIMENSION
Δ = REFERENCE DIMENSION
* DIMENSIONS ARE TO INTERSECTION OF LINES
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)